

CONSTANT FILLING WATER OR OIL FLUID COUPLINGS

YOX




YOXvs



	500	600	750	1000	1500	3000
150				0.05-0.2	0.2-0.55	
180				0.1-0.3	0.5-1.1	
200				0.2-0.55	0.8-2.2	
220				0.4-1.1	1.5-3	12-16.5
360			2-3.8	5-10	16-30	50-100
422			4-8	8-18.5	28-75	80-145
487			11-22	25-50	70-160	
560			18-36	40-80	120-270	
650			37-73	90-176	260-480	
750		36-75	70-143	170-330	380-760	
875			145-280	330-620		
1000	83-165	160-300	260-590			
1150	175-350	265-615	525-1190			
1250	235-540	400-935	800-1800			
1320	315-710	650-1200	1050-2360			

VARIABLE SPEED FLUID COUPLING

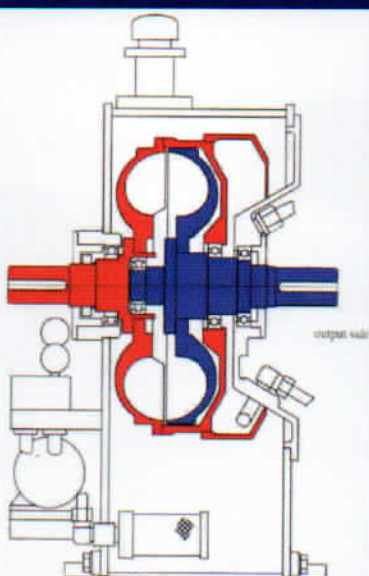

1. FILLING OF FLUID IS CONTROLLED BY VALVES

2. THE RATED SLIP IS 1,5 - 3%

